


Project	
Type	
Contact	



GALA SPEAKER

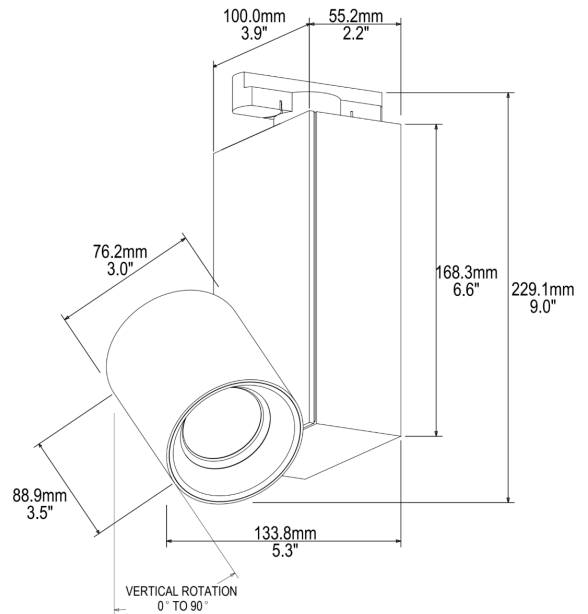

1- 2 speakers
3" | 84 dB per speaker
Round | Adjustable 2 axes | Track

MA	GALAS	—	—	—	—	—
Type	Model	Track	Speaker	Driver	Amplifier	Color
MA	GALAS:Gala Speaker	L:Line Track M:Mini Track	1:1 2:2	A: Zaniboni	A: Multiroom B: Only Bluetooth	WS:Matte White BK:Matte Black BP:Black Pearl SN:Satin Nickel BZ:Bronze CC:Custom Color



Specifications

Amplifier Multi-room WiFi/Bluetooth

The amplifier may switch between stereo and mono mode, with stereo providing maximum 50W L&R channels and mono providing a single maximum 100W channel. With multiple devices, the wireless multiroom audio system can play the same music to each room in sync or play different music to different rooms.

Amplifier only Bluetooth

The amplifier can just control two speakers at the same time. The connection is just Bluetooth. This amplifier can switch between stereo and mono mode. (Gala speaker can be ordered with one or two speakers.

Speaker

2" full-range ported speaker thanks to its low resonant frequency the frequency response starts already at 120 Hz. Perfect for background music, sound masking and Meeting calls. The speaker is powered by a track adapter to connect into line voltage track.

RMS Power	5 W	Driver Diameter	2"
Maximum Power	8 W	Type of Cabinet	Ported
Nominal Impedance	8 Ohm	Type Of Port	0.5" ID
Frequency Response	150-20,000 Hz	Cabinet Material	Aluminum
Sound Pressure Level (SPL)	84 dB	Cabinet's Volume	22.14 sq. inch
Resonance Frequency	290 Hz	Type of connection	Bluetooth-Multi-rooms
Voice Coil Diameter	0.55"	Amplifier Power	50W+50W