

Project

Type

Contact




# LARA 3DL SS

#### 3" | 1191 lm / per light source Round | Fixed | Direct / Indirect, Wall Light Performance Options 36W (18W x 2 lights) 52W (26W x 2 lights) Source Lumens 4064 lm 5710 lm 1786 lm (893 x 2 lights) 2382 lm (1191 x 2 lights) Delivered Lumens 46 lm 1400 mA Current 1000 mA CRI/CCT Multiplier 2700°K 3000°K 3500°K 4000°K 80 CRI 0.93 1.00 1.00 1.07

0.75

0.81

0.87

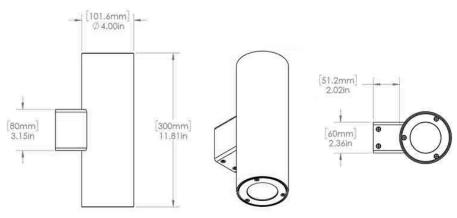



W2 Source	L3DLS Model	— Wattage	—– Kelvin	— CRI	— Beam	— Lens	— Color	—– Driver	—— Installation	I.P. Rating
W2	L3DLS:Lara 3DL SS	18:18W ( 9W x 2) 26:26W (13W x2)	27:2700k 30:3000k 35:3500k 40:400k AM:Amber RW:RGBW TD:Tunable White 2700K to 6500K (Daylight) TH:Tunable White 1800K to 4000K (Hospitality)	A:80 B:95	6:60° 3:36° 2:24° 1:10°(WD, TH, TD, and RGBW not possible with 10°.)	C:Clear F:Frosted X:Hex Louver + Solite L:Cross Louver + Solite P:Prismatic S:Solite	SS:Marine Grade Stainless Steel WS:Matte White BK:Matte Black CC:Custom Color	0:No Driver N:Non-Dimmable N:Non-Dimmable() E:ELV Dimmable E:ELV Dimmable() Z:0-10V Dimmable to 1% Z:0-10V Dimmable to 1%() B:Bluetooth L:Lutron™ (Lutron EcoSystem) D:DALI X:DMX V:Constant Voltage Dimmable (Price does not include power supply)	00:No Housings (Option when product is installed in Low Voltage - Class 2) R0:Retro-Fit Enclosure RL:Retro-Fit for Lutron™ M0:Jbox Cover	W:Wet IP 65

Optional Emergency Backup Battery can be found on Products/<u>Accessories</u>

Generated on **04-29-2024** 

95 CRI

0.69

## **Specifications**

This specification Grade LED downlight offers a wide selection of LED modules options to address design requirements in the spaces it illuminates. Many additional custom options are available; please contact manufacturer for details.

### **LED** source

Tool-free field-replaced LED module. Propriety high performance aluminum die cast heatsink for maximum LED life.

Computer-optimized reflector design. High reflected finish aluminum. Tool-free fieldinterchangeable reflectors and lens. 0-20°(O version), 0-40°(J version) vertical and 360° horizontal adjustment.

### **Body**

316L Stainless Steel.

#### Trim

316L Stainless Steel.

### **Fixture retention**

Fixture retention: Wall mounted with included bracket.

#### Life

Rated for 50,000 hours at 70% lumen maintenance.

## Label

ETL listed for US Canada. CE labeled. CCC label available on request.

### Warranty


5 years limited warranty.

#### Wet location


(if option is available and selected on page 1) Sealed lens and integral silicon gasket behind the trim

## Dimming compatibility

Zaniboni fixture are compatible with all major dimming protocol in the industry. Please refer to zanibonilighting.com for general compatibility and wiring diagrams. Zaniboni recommends testing your unique dimming configuration as the exact full configuration (Dimmer, drivers, fixture quantities, voltage) may affect dimming performance.







# T: Lutron Hi-Lume A LTE

76

120V, 50/60Hz.

For 2-wire Forward Phase Controls. Continuous dimming to 1%

Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

# N: Non-Dimmable

110-277V, 50/60Hz.

Economic solution for ON-OFF applications not requiring dimming.

## E: ELV Dimmable

110-277V, 50/60Hz.

For ELV(Electronic Low Voltage) dimmers. Best for new construction application. Dims down to less than 10% light output(most cases). Consult dimming manufacturer for installation instructions. Must meet dimmer Minimum load Requirements.

## Z: 0-10V Dimmable

110-277, 50/60Hz.

Prevalent solution on commercial projects. Integrates into a variety of building management and day lighting controls. Dims down to less than 1% light output(most cases). Must meet dimmer Minimum Load Requirements. Consult dimming manufacturer for installation instructions.

## L: Lutron Hi-Lume A LDE

120-277V, 50/60Hz.

For LUTRON EcoSystem drivers only. Continuous dimming to 1%

Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

N&E: Non-Dimmable & ELV Drivers

1.00

N&E: Non-Dimmable, ELV Drivers & 0-10V Dimmable

Measurements	LWH in mm	LWH in inches	Measurements	LWH in mm	LWH in inches		
7W - 9W - 13W	85.5 - 38 - 27.7	3.36" - 1.49" - 1.09"	7W - 9W - 13W	85.3 - 38 - 27.7	3.36" - 1.49" - 1.09"		
18W - 26W	89 - 41 - 31.5	3.5" - 1.62" - 1.24"	18W - 26W	89 - 41 - 31.5	3.5" - 1.62" - 1.24"		
36W - 50W	89 - 41 - 31.5	3.5" - 1.62" - 1.24"	36W - 50W	138 - 47 - 32	5.43" - 1.85" - 1.25"		