




## BONGO 4 (REMOTE)

1 Light Sources

4" | 2572 lm / per light source  
Round | Fixed | Surface Mounted

| Performance Options | 9W      | 13W     | 18W     | 26W     |
|---------------------|---------|---------|---------|---------|
| Source Lumens       | 1199 lm | 1627 lm | 2056 lm | 2855 lm |
| Delivered Lumens    | 514 lm  | 1157 lm | 1929 lm | 2572 lm |
| Lumens / Watt       | 57 lm   | 89 lm   | 107 lm  | 99 lm   |
| Current             | 250 mA  | 350 mA  | 500 mA  | 700 mA  |
| CRI/CCT Multiplier  | 2700°K  | 3000°K  | 3500°K  | 4000°K  |
| 80 CRI              | 0.93    | 1.00    | 1.00    | 1.07    |
| 95 CRI              | 0.69    | 0.75    | 0.81    | 0.87    |

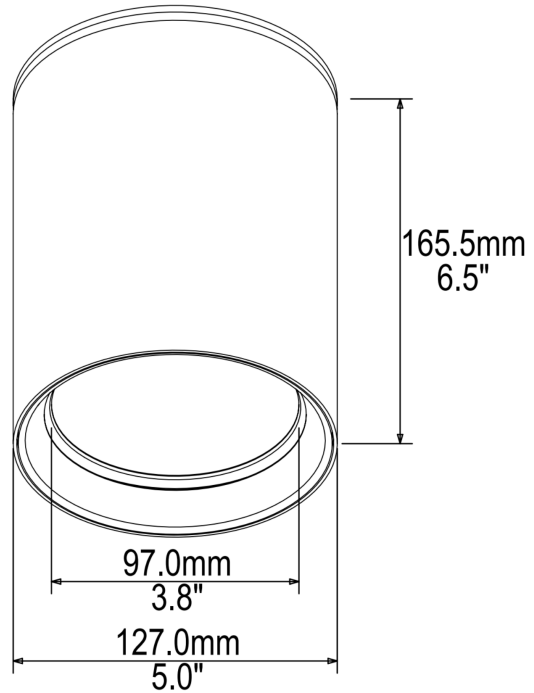

| S4     | BNG4R                  | —                                    | —  | —            | —  | —   | —  | —  | —  | —           |
|--------|------------------------|--------------------------------------|--|--------------|--|---|--|--|--|-------------|
| Source | Model                  | Wattage                              | Kelvin   | CRI          | Beam   | Lens  | Color  | Driver   | Installation                                       | I.P. Rating |
| S4     | BNG4R:Bongo 4 (Remote) | 09:09W<br>13:13W<br>18:18W<br>26:26W | 27:2700k<br>30:3000k<br>35:3500k<br>40:4000k<br>WD:Warm Dim 1800K to 3000K (Not possible with 18W)<br>RW:RGBW<br>TD:Tunable White 2700K to 6500K (Daylight)<br>TH:Tunable White 1800K to 4000K (Hospitality) | A:80<br>B:95 | 6:60°<br>3:36°<br>2:24°<br>1:10°(WD, TH, TD, and RGBW not possible with 10°) | F:Frosted<br>X:Hex Louver + Solite<br>L:Cross Louver + Solite<br>P:Prismatic<br>S:Solite<br>C:Clear | WS:Matte White<br>BK:Matte Black<br>WK:White Trim / Black Splay<br>BP:Black Pearl<br>SN:Satin Nickel<br>BZ:Bronze<br>CC:Custom Color | 0:No Driver (Option when product is installed in Low Voltage - Class 2)<br>N:Non-Dimmable<br>N:Non-Dimmable ()<br>E:ELV Dimmable<br>E:ELV Dimmable()<br>Z:0-10V Dimmable to 1%<br>Z:0-10V Dimmable to 1%()<br>L:Lutron™ (Lutron EcoSystem / Canopy for on-board ELV or 0-10V driver)<br>B:Bluetooth<br>D:DALI<br>X:DMX | RL:Retro-Fit for Lutron™<br>R0:Retro-Fit Enclosure | D:Dry IP 20 |

Optional Emergency Backup Battery can be found on Products/[Accessories](#)

Generated on 05-09-2024

Specifications

This specification Grade LED downlight offers a wide selection of LED modules options to address design requirements in the spaces it illuminates. Many additional custom options are available; please contact manufacturer for details.

LED source

Tool-free field-replaced LED module. Propriety high performance aluminum die cast heatsink for maximum LED life.

Source

Computer-optimized reflector design. High reflected finish aluminum. Tool-free field-interchangeable reflectors and lens. 0-20°(O version), 0-40°(J version) vertical and 360° horizontal adjustment.

Body

Die-cast aluminum frame and body.

Trim

Die-cast aluminum CNC machine finished Minimal thickness. White can be field painted to match adjacent finishes.

Fixture retention

Two torsion springs hold the fixture tight to the ceiling accommodating ceiling thickness from 1/16" to 1". Special springs for thicker ceiling available on request.

Life

Rated for 50,000 hours at 70% lumen maintenance.

Label

ETL listed for US Canada. CE labeled. CCC label available on request.

Warranty


5 years limited warranty.

Wet location

(if option is available and selected on page 1) Sealed lens and integral silicon gasket behind the trim.

Dimming compatibility

Zaniboni fixture are compatible with all major dimming protocol in the industry. Please refer to [zanibonilighting.com](http://zanibonilighting.com) for general compatibility and wiring diagrams. Zaniboni recommends testing your unique dimming configuration as the exact full configuration (Dimmer, drivers, fixture quantities, voltage) may affect dimming performance.

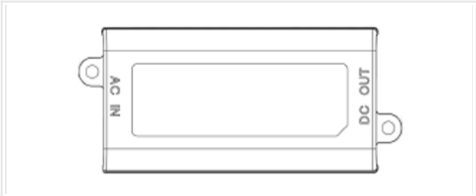

N: Non-Dimmable

110-277V, 50/60Hz.


Economic solution for ON-OFF applications not requiring dimming.



E: ELV Dimmable

110-277V, 50/60Hz.


For ELV(Electronic Low Voltage) dimmers. Best for new construction application. Dims down to less than 10% light output(most cases). Consult dimming manufacturer for installation instructions. Must meet dimmer Minimum load Requirements.

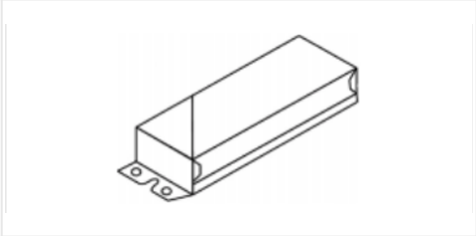

Z: 0-10V Dimmable

110-277, 50/60Hz.


Prevalent solution on commercial projects. Integrates into a variety of building management and day lighting controls. Dims down to less than 1% light output(most cases). Must meet dimmer Minimum Load Requirements. Consult dimming manufacturer for installation instructions.

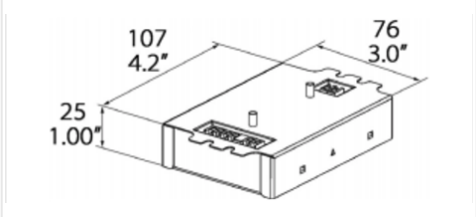

L: Lutron Hi-Lume A LDE

120-277V, 50/60Hz.

For LUTRON EcoSystem drivers only. Continuous dimming to 1% Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

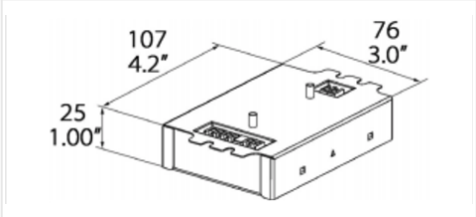

T: Lutron Hi-Lume A LTE

120V, 50/60Hz.

For 2-wire Forward Phase Controls. Continuous dimming to 1% Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.


N&E: Non-Dimmable & ELV Drivers

| Measurements  | LWH in mm        | LWH in inches         |
|---------------|------------------|-----------------------|
| 7W - 9W - 13W | 85.5 - 38 - 27.7 | 3.36" - 1.49" - 1.09" |
| 18W - 26W     | 89 - 41 - 31.5   | 3.5" - 1.62" - 1.24"  |
| 36W - 50W     | 89 - 41 - 31.5   | 3.5" - 1.62" - 1.24"  |

N&E: Non-Dimmable, ELV Drivers & 0-10V Dimmable


| Measurements  | LWH in mm        | LWH in inches         |
|---------------|------------------|-----------------------|
| 7W - 9W - 13W | 85.3 - 38 - 27.7 | 3.36" - 1.49" - 1.09" |
| 18W - 26W     | 89 - 41 - 31.5   | 3.5" - 1.62" - 1.24"  |
| 36W - 50W     | 138 - 47 - 32    | 5.43" - 1.85" - 1.25" |

## Installation

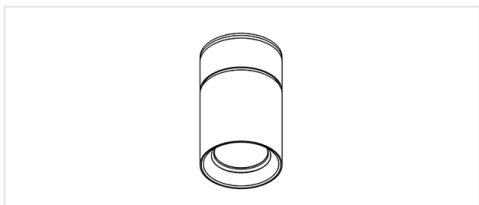


### **L: Canopy for On-Board Driver**

Canopy for on-board ELV or 0-10V driver

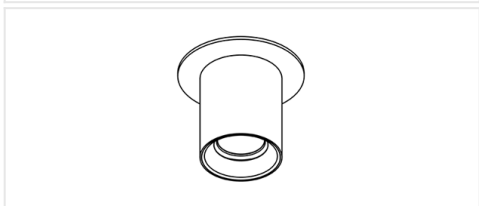

### **M: J-Box Cover**

Beauty ring to cover 4.0" j-box opening. Driver is remote

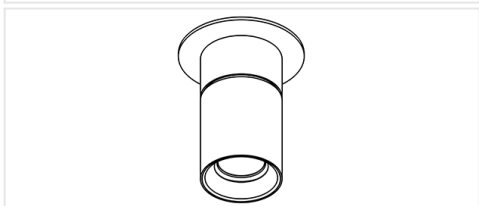

### **N: Canopy for On-Board Driver + J-Box Cover**

Canopy for on-board ELV or 0-10V driver. Beauty ring to cover 4.0" j-box opening