



TIBI MT

1 Light Sources


0.7" | 291 lm / per light source
| Fixed | Mini-Track

| | | | | |
|---------------------|--------|--------|--------|--------|
| Performance Options | 3W | | | |
| Source Lumens | 404 lm | | | |
| Delivered Lumens | 291 lm | | | |
| Lumens / Watt | 97 lm | | | |
| Current | 350 mA | | | |
| CRI/CCT Multiplier | 2700°K | 3000°K | 3500°K | 4000°K |
| 80 CRI | 0.93 | 1.00 | 1.00 | 1.07 |
| 95 CRI | 0.69 | 0.75 | 0.81 | 0.87 |

| | |
|---------|--|
| Project | |
| Type | |
| Contact | |

The powered side of the mini track adapter is identified by the ETL label. Track is available as a standard in 48V. If 24V is required, it will be a custom order, please contact your sales person.

*1: This is a 24V luminaire. Driver to be specified separately. For line-voltage control and dimming select the appropriate driver on spec sheet page 3.

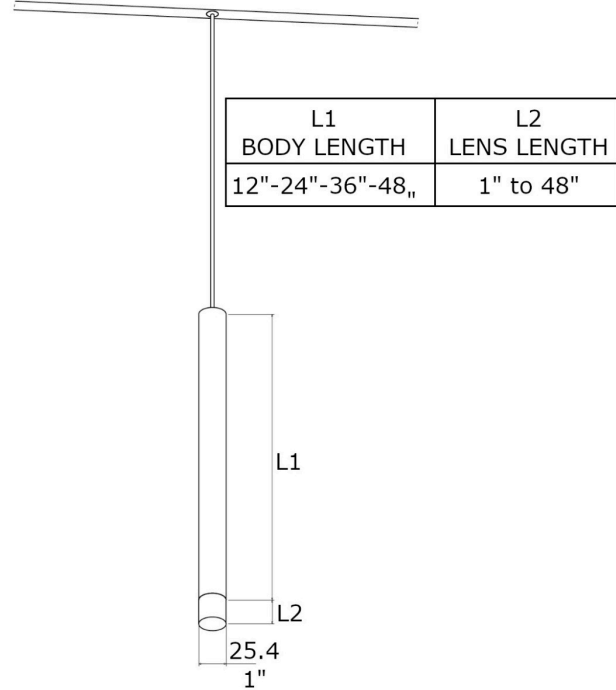

| PO | TI | — | — | — | — | — | — | — | — | — | — |
|--------|------------|---|----------------------------|--|--------------|--|---|--|--|---|-------------|
| Source | Model | Size | Wattage | Kelvin | CRI | Beam | Diffuser | Color | Converter | Installation | I.P. Rating |
| P0 | TI:TIBI MT | 121:12 in 181:18 in 124:24 in 136:36 in 148:48 in | 03:03W 07:07W 09:09W | 27:2700k 30:3000k 35:3500k 40:4000k AM:Amber | A:80 B:95 | 6:60° 3:36° 2:24° 1:10°(WD, TH, TD, and RGBW not possible with 10°) | 0:None (Flush Diffuser) F:Frosted (All standard diffuser is 1") N:Champagne (All standard diffuser is 1") | WS:Matte White BK:Matte Black CC:Custom-Min Qty:20pc | V1:24 VDC 1-Channel Converter *1 (Static/Warm Dim) | 00:No Housings (Option when product is installed in Low Voltage - Class 2) MD:Mini Track Mounted | D:Dry IP 20 |

Optional Emergency Backup Battery can be found on Products/[Accessories](#)

Generated on 04-20-2024

Specifications

This specification Grade LED downlight offers a wide selection of LED modules options to address design requirements in the spaces it illuminates. Many additional custom options are available; please contact manufacturer for details.

LED source

Tool-free field-replaced LED module. Proprietary high performance aluminum die cast heatsink for maximum LED life.

Source

Computer-optimized reflector design. High reflected finish aluminum. Tool-free field-interchangeable reflectors and lens. 0-20°(O version), 0-40°(J version) vertical and 360° horizontal adjustment.

Body

Die-cast aluminum frame and body.

Trim

Die-cast aluminum CNC machine finished Minimal thickness. White can be field painted to match adjacent finishes.

Fixture retention

Two torsion springs hold the fixture tight to the ceiling accommodating ceiling thickness from 1/16" to 1". Special springs for thicker ceiling available on request.

Life

Rated for 50,000 hours at 70% lumen maintenance.

Label

ETL listed for US Canada. CE labeled. CCC label available on request.

Warranty

5 years limited warranty.

Wet location

(if option is available and selected on page 1) Sealed lens and integral silicon gasket behind the trim.

Dimming compatibility

Zaniboni fixture are compatible with all major dimming protocol in the industry. Please refer to zanibonilighting.com for general compatibility and wiring diagrams. Zaniboni recommends testing your unique dimming configuration as the exact full configuration (Dimmer, drivers, fixture quantities, voltage) may affect dimming performance.



N: Non-Dimmable

110-277V, 50/60Hz.


Economic solution for ON-OFF applications not requiring dimming.



E: ELV Dimmable

110-277V, 50/60Hz.


For ELV(Electronic Low Voltage) dimmers. Best for new construction application. Dims down to less than 10% light output(most cases). Consult dimming manufacturer for installation instructions. Must meet dimmer Minimum load Requirements.

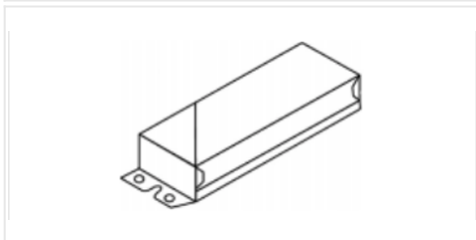

Z: 0-10V Dimmable

110-277, 50/60Hz.

Prevalent solution on commercial projects. Integrates into a variety of building management and day lighting controls. Dims down to less than 1% light output(most cases). Must meet dimmer Minimum Load Requirements. Consult dimming manufacturer for installation instructions.

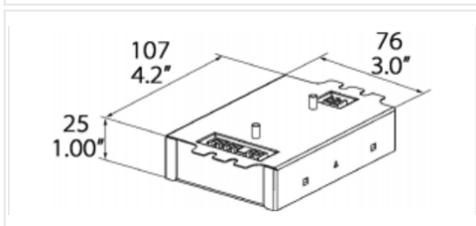


L: Lutron Hi-Lume A LDE

120-277V, 50/60Hz.

For LUTRON EcoSystem drivers only. Continuous dimming to 1%

Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

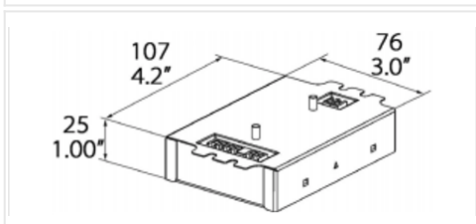

T: Lutron Hi-Lume A LTE

120V, 50/60Hz.

For 2-wire Forward Phase Controls. Continuous dimming to 1%

Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

N&E: Non-Dimmable & ELV Drivers

| Measurements | LWH in mm | LWH in inches |
|---------------|------------------|-----------------------|
| 7W - 9W - 13W | 85.5 - 38 - 27.7 | 3.36" - 1.49" - 1.09" |
| 18W - 26W | 89 - 41 - 31.5 | 3.5" - 1.62" - 1.24" |
| 36W - 50W | 89 - 41 - 31.5 | 3.5" - 1.62" - 1.24" |

N&E: Non-Dimmable, ELV Drivers & 0-10V Dimmable

| Measurements | LWH in mm | LWH in inches |
|---------------|------------------|-----------------------|
| 7W - 9W - 13W | 85.3 - 38 - 27.7 | 3.36" - 1.49" - 1.09" |
| 18W - 26W | 89 - 41 - 31.5 | 3.5" - 1.62" - 1.24" |
| 36W - 50W | 138 - 47 - 32 | 5.43" - 1.85" - 1.25" |