

|         |  |
|---------|--|
| Project |  |
| Type    |  |
| Contact |  |




### LARA 3 S

1 Light Sources

3" | 1191 lm / per light source  
Round | Fixed | Wall Light

|                     |         |         |        |        |
|---------------------|---------|---------|--------|--------|
| Performance Options | 9W      | 13W     |        |        |
| Source Lumens       | 1188 lm | 1563 lm |        |        |
| Delivered Lumens    | 893 lm  | 1191 lm |        |        |
| Lumens / Watt       | 99 lm   | 92 lm   |        |        |
| Current             | 250 mA  | 350 mA  |        |        |
| CRI/CCT Multiplier  | 2700°K  | 3000°K  | 3500°K | 4000°K |
| 80 CRI              | 0.93    | 1.00    | 1.00   | 1.07   |
| 95 CRI              | 0.69    | 0.75    | 0.81   | 0.87   |

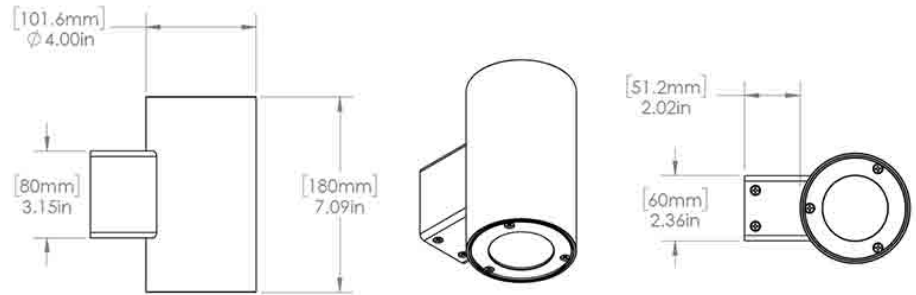

| W2     | LAR3S          | —               | —  | —            | —  | —   | —  | —  | —                                | —              |
|--------|----------------|-----------------|--|--------------|--|---|--|--|----------------------------------|----------------|
| Source | Model          | Wattage         | Kelvin   | CRI          | Beam   | Lens  | Color  | Driver   | Installation                     | I.P. Rating    |
| W2     | LAR3S:Lara 3 S | 09:9W<br>13:13W | 27:2700k<br>30:3000k<br>35:3500k<br>40:4000k<br>AM:Amber<br>RW:RGBW<br>TD:Tunable White 2700K to 6500K (Daylight)<br>TH:Tunable White 1800K to 4000K (Hospitality) | A:80<br>B:95 | 6:60°<br>3:36°<br>2:24°<br>1:10°(WD, TH, TD, and RGBW not possible with 10°) | C:Clear<br>F:Frosted<br>X:Hex Louver + Solite<br>L:Cross Louver + Solite<br>P:Prismatic<br>S:Solite | WS:Matte White<br>BK:Matte Black<br>BZ:Bronze<br>SN:Satin Nickel<br>WK:White Trim / Black Splay<br>CC:Custom Color | 0:No Driver<br>N:Non-Dimmable<br>E:ELV Dimmable<br>Z:0-10V Dimmable to 1%<br>B:Bluetooth<br>L:Lutron™ (Lutron EcoSystem)<br>D:DALI<br>X:DMX<br>V:Constant Voltage Dimmable (Price does not include power supply) | 00:No Housings<br>M0:J-Box Cover | W:Wet<br>IP 65 |

Optional Emergency Backup Battery can be found on Products/[Accessories](#)

Generated on 04-27-2024

## Specifications

This specification Grade LED downlight offers a wide selection of LED modules options to address design requirements in the spaces it illuminates. Many additional custom options are available; please contact manufacturer for details.

### LED source

Tool-free field-replaced LED module. Proprietary high performance aluminum die cast heatsink for maximum LED life.

### Source

Computer-optimized reflector design. High reflected finish aluminum. Tool-free field-interchangeable reflectors and lens. 0-20°(O version), 0-40°(J version) vertical and 360° horizontal adjustment.

### Body

316L Stainless Steel.

### Trim

316L Stainless Steel.

### Fixture retention

Fixture retention: Wall mounted with included bracket.

### Life

Rated for 50,000 hours at 70% lumen maintenance.

### Label

ETL listed for US Canada. CE labeled. CCC label available on request.

### Warranty

5 years limited warranty.

### Wet location


(if option is available and selected on page 1) Sealed lens and integral silicon gasket behind the trim.

### Important

**Driver doesn't fit on-board. Driver must be remote.**

## Dimming compatibility

Zaniboni fixture are compatible with all major dimming protocol in the industry. Please refer to [zanibonilighting.com](http://zanibonilighting.com) for general compatibility and wiring diagrams. Zaniboni recommends testing your unique dimming configuration as the exact full configuration (Dimmer, drivers, fixture quantities, voltage) may affect dimming performance.

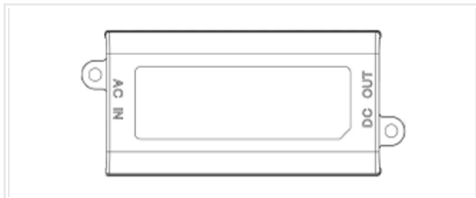

### N: Non-Dimmable

110-277V, 50/60Hz.


Economic solution for ON-OFF applications not requiring dimming.



### E: ELV Dimmable

110-277V, 50/60Hz.


For ELV(Electronic Low Voltage) dimmers. Best for new construction application. Dims down to less than 10% light output(most cases). Consult dimming manufacturer for installation instructions. Must meet dimmer Minimum load Requirements.

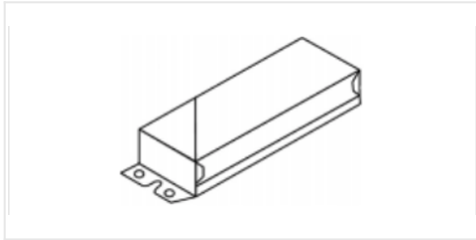

### Z: 0-10V Dimmable

110-277, 50/60Hz.


Prevalent solution on commercial projects. Integrates into a variety of building management and day lighting controls. Dims down to less than 1% light output(most cases). Must meet dimmer Minimum Load Requirements. Consult dimming manufacturer for installation instructions.

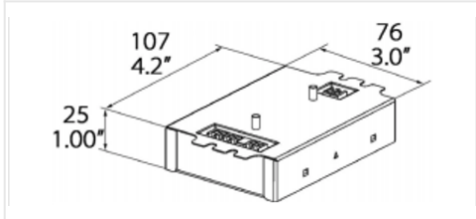

### L: Lutron Hi-Lume A LDE

120-277V, 50/60Hz.

For LUTRON EcoSystem drivers only. Continuous dimming to 1% Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

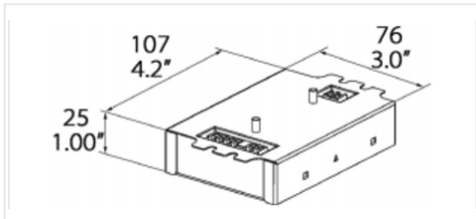

### T: Lutron Hi-Lume A LTE

120V, 50/60Hz.

For 2-wire Forward Phase Controls. Continuous dimming to 1% Consult dimming manufacturer for installation instructions. Requires access from above on all fixtures with a cutout below 81mm.

N&E: Non-Dimmable & ELV Drivers

| Measurements  | LWH in mm        | LWH in inches         |
|---------------|------------------|-----------------------|
| 7W - 9W - 13W | 85.5 - 38 - 27.7 | 3.36" - 1.49" - 1.09" |
| 18W - 26W     | 89 - 41 - 31.5   | 3.5" - 1.62" - 1.24"  |
| 36W - 50W     | 89 - 41 - 31.5   | 3.5" - 1.62" - 1.24"  |

N&E: Non-Dimmable, ELV Drivers & 0-10V Dimmable

| Measurements  | LWH in mm        | LWH in inches         |
|---------------|------------------|-----------------------|
| 7W - 9W - 13W | 85.3 - 38 - 27.7 | 3.36" - 1.49" - 1.09" |
| 18W - 26W     | 89 - 41 - 31.5   | 3.5" - 1.62" - 1.24"  |
| 36W - 50W     | 138 - 47 - 32    | 5.43" - 1.85" - 1.25" |