


INDIRECT : 24Vdc, 500mA, 18W    DIRECT : 24Vdc, 500mA, 18W

**Input Voltage: 110 - 277 Vac**

Max Connected LOAD: 36 W

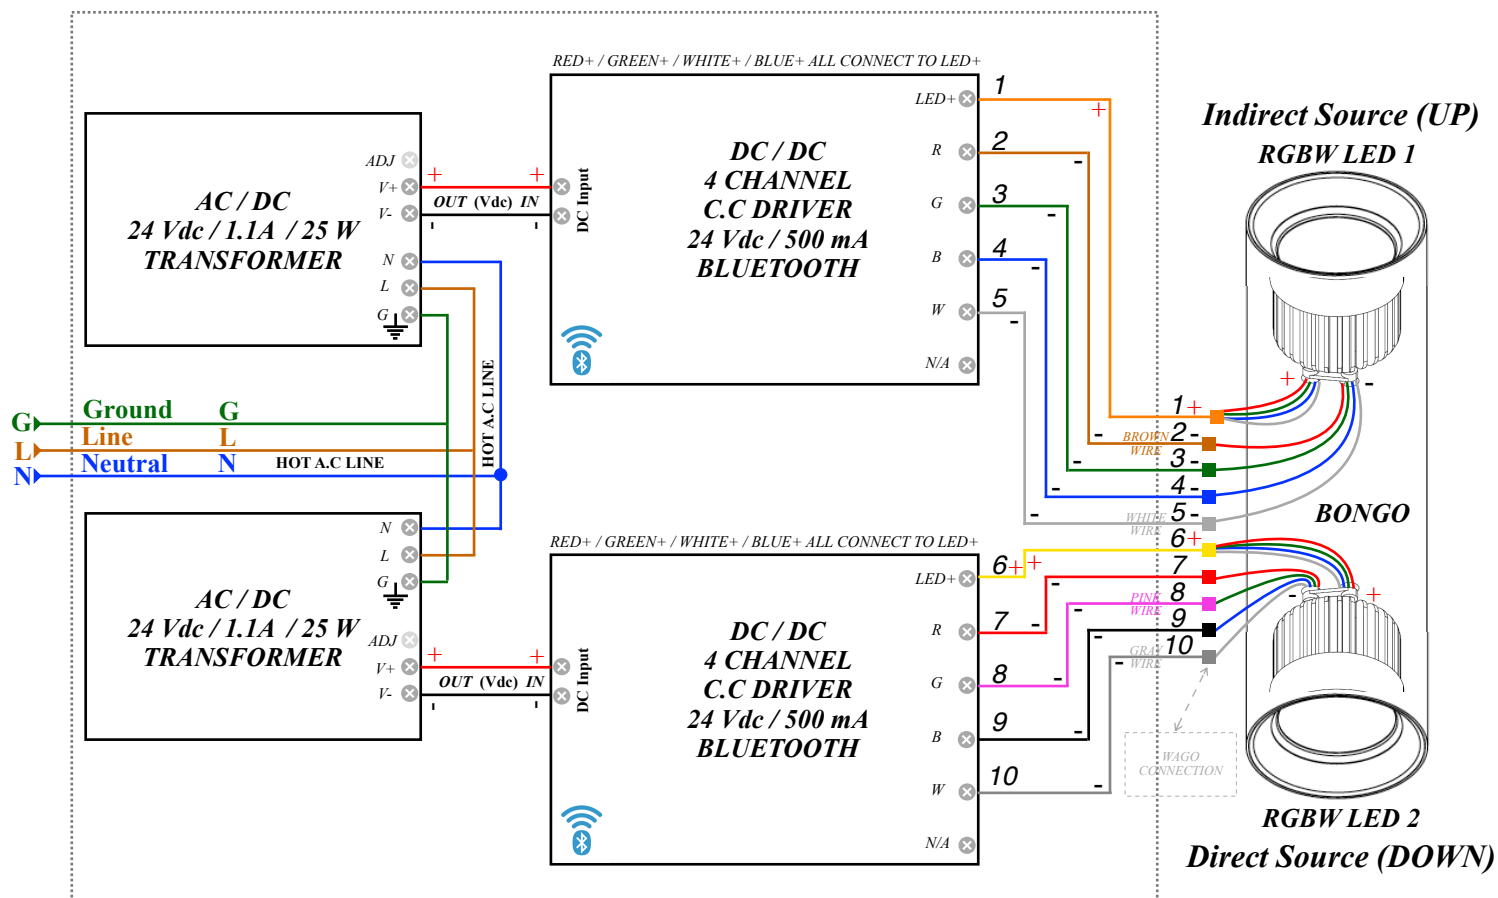

**Note:**

\* All wires coming out of RGBW LED are labeled with positive and negative marking.

– Connect all POSITIVE wires of LED 1 to ORANGE and all POSITIVE wires of LED 2 to YELLOW of the 10 wire Power Cord used to hang BONGO Fixture.

***\*\* All LED Chanel RGBW are between [ 10 - 13 ] Vdc, DO NOT Apply higher DC Voltage and LOAD MUST be connected before Power ON, AC is applied to the circuit.***

\*\*\* LINE & NEUTRAL & (G) of both AC / DC is connected to LINE and NEUTRAL & (G) of the Building.

\*Illustration is for example purposes only. Components may vary depending on technical requirements of the light.\*

101 North Garden Avenue • Clearwater, Florida 33755 USA • P 727.213.0410 • [Support@ZaniboniLighting.com](mailto:Support@ZaniboniLighting.com)

The manufacturer reserves the right to change or modify the design, dimensions and specifications at any time without notice. The manufacturer accepts no liability for consequential damage which is occasioned to the user based on the data provided. For more information contact your representative or go to [ZaniboniLighting.com](http://ZaniboniLighting.com).