


Wiring Diagram I MINI TD

C.V [24Vdc / 30W / 1.25A] / 0-10V Dimming ; C.C 350mA, 18V, 7W

Input Voltage: 110...277 Vac

Max Connected LOAD: 7W

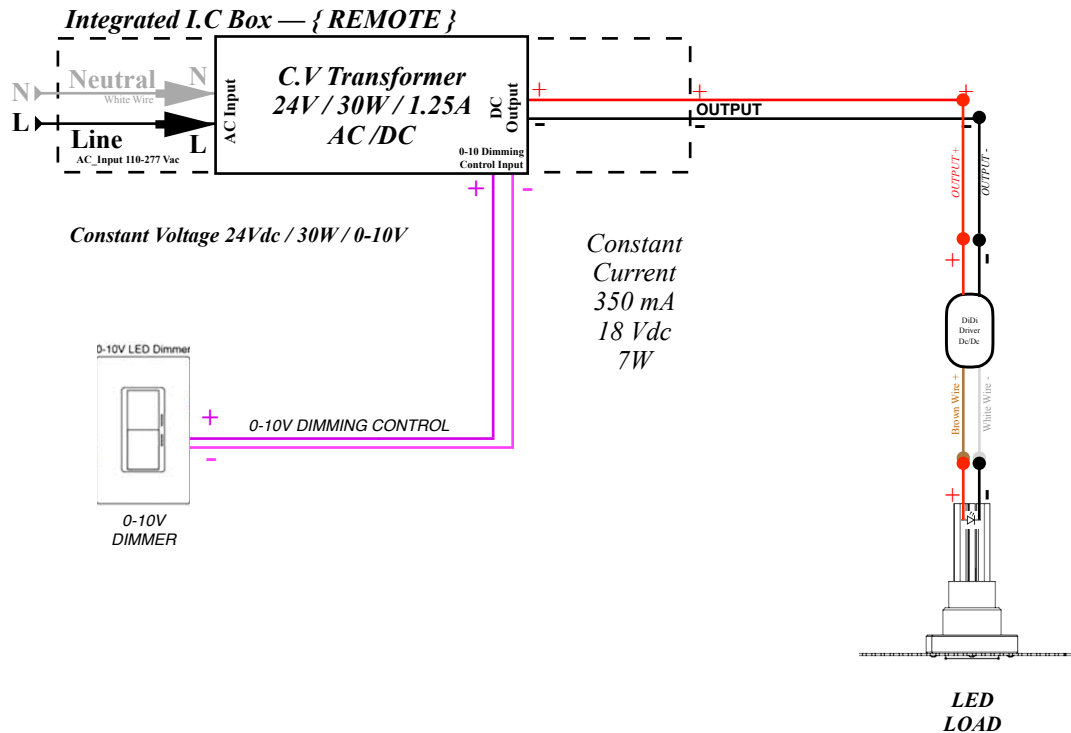

Note:

- * J-Box's may be Separated or Integrated with the C.V Transformer for all Input & Output Connections *
- ** Constant Voltage 96W has 0-10V Control: Positive is Purple(+) and Negative is Pink(-) **
- *** The C.V will be REMOTE and fixture power will determine the Wire AWG and Distance ***

WARNING:

CONNECTION OF LUMINAIRE TO POWERED DRIVER WILL RESULT IN PERMANENT DAMAGE TO THE LED AND VOIDED PRODUCT WARRANTY.

EACH OF THE LED OUTPUTS ON DMX DRIVER ARE INDIVIDUAL CHANNELS & POLARITY MUST BE FOLLOWED.

Illustration is for example purposes only. Components may vary depending on technical requirements of the light.