


Direct/Indirect Double Mini-Track D

Project:

Type:

Contact:

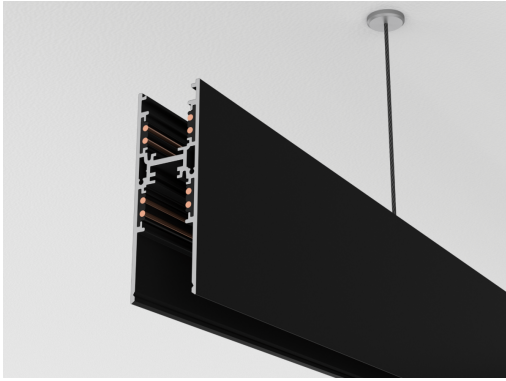

K M2D



MODEL	Track Length	Color
M2D: Direct/Indirect Double Mini-Track D	04 : 4 FT 08 : 8 FT	W00 : White B00 : Black

Notes:

Drivers are designed with universal input voltage compatibility, accommodating a range from 120V to 277V.

DIMENSIONS / DRAWINGS


MAX LOAD

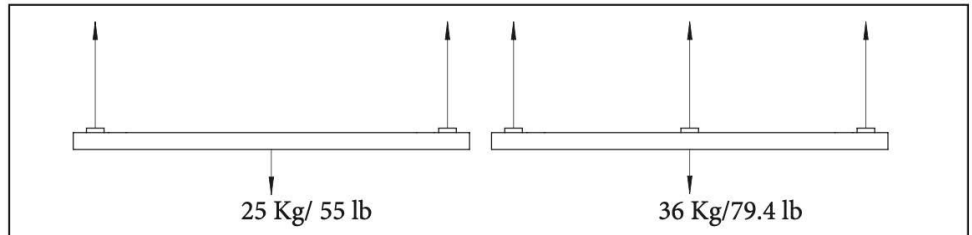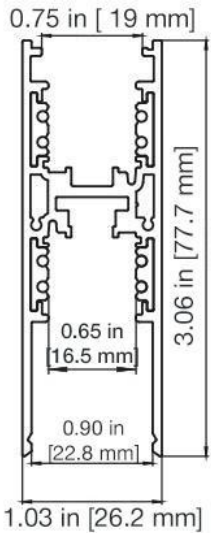

Max. Distance from 2 cables of the suspension kit cords must be:





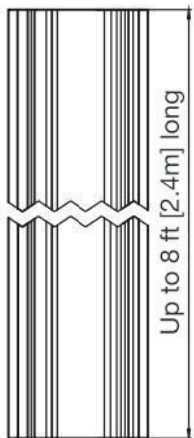




2.95 ft (900mm) for 25Kg/55lb Max. load.















1.47 ft (450mm) for 36Kg/79.5lb Max. load.




DIRECT/INDIRECT DOUBLE PENDANT MINI-TRACK ACCESSORIES

D SERIES

CODE	NAME	DESCRIPTION		
K-MED-00-B0009 W-White	End Cap	End Cap For Pendant/Wall Mounted Direct/ Indirect Mini-Track, Painted Metal.		
K-MF0-00-BEND0 W-White	End Feed	Mini-Track Short End Feed		
K-MF0-00-BMIDE W-White	End Feed	Mini-Track Short Jointing Connector with Electrical Connection.		
K-MF0-00-BMIDM W-White	Non-conductive Joiner	Mini-Track Short Mechanical Jointing Connector		
K-MF0-00-BCOR0 W-White	Corner Conductive Joiner	Mini-Track And Adjustable Corner Feed		
K-MC0-03-BSTAE W-White	Cover Strip	Mini-Track Cover Strip 3.3FT (1M)		
K-MC0-06-BSTAE W-White	Cover Strip	Mini-Track Cover Strip 6.6 FT (2M)		

CODE	NAME	DESCRIPTION		
K-MC0-09-BSTAE W-White	Cover Strip	Mini-Track Cover Strip 9.8FT (3M)		
K-MB0-MN-BREIO W-White	Reinforcing Bracket	Mini-Track Reinforcing Bracket For Jointing Connector		
K-MK0-04-00100	Suspension Kit (With Short Bracket)	Mini-Track Suspension Kit Round Head, Steel Cable 1.5MM Diameter, 4.9FT (1.5M) Long, Short Bracket With Gripper		
K-MK0-09-00100	Suspension Kit (With Short Bracket)	Mini-Track Suspension Kit Round Head, Steel Cable 1.5MM Diameter, 9.8FT (3M) Long, Short Bracket With Gripper		
K-MK0-16-00100	Suspension Kit (With Short Bracket)	Mini-Track Suspension Kit Round Head, Steel Cable 1.5MM Diameter, 16.4FT (5M) Long, Short Bracket With Gripper		
K-MK0-04-00200	Suspension Kit (With Long Bracket)	Mini-Track Suspension Kit Round Head, Steel Cable 1.5MM Diameter, 4.9FT (1.5M) Long, Long Bracket With Gripper		
K-MK0-09-00200	Suspension Kit (With Long Bracket)	Mini-Track Suspension Kit Round Head, Steel Cable 1.5MM Diameter, 9.8FT (3M) Long, Long Bracket With Gripper		

CODE	NAME	DESCRIPTION
K-MK0-16-00200	Suspension Kit (With Long Bracket)	Mini-Track Suspension Kit Round Head, Steel Cable 1.5MM Diameter, 16.4FT (5M) Long, Long Bracket With Gripper



K-M00-CUTTING TOOL	Cutting Tool	Cutting Tool For Pendant Kit Aircraft
--------------------	--------------	---------------------------------------



Product Overview

Type: Direct/Indirect Double Mini-Track D

Circuit(s)/Amps: 2 circuits: 2x +/- 15A/0-60V dc or 1 circuit + Data Bus: +/- 10A/0-60V +

D+/D-Voltage: 24V/48V

Weight: 1.01 lb. [459g] / ft / 1506.2g/kg

Available Colors: Black RAL 9005 embossed / White RAL 9016 embossed


Driver: DALI 1% dim, 0-10V 1% dim, Forward/Reverse Phase Cut dim

Compatible Track Lighting

Linear: 90+ CRI, 3000K



L1-RIGAJO

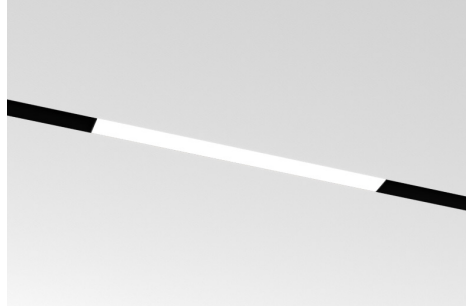

L1-RIGMO



L1-RIGAJ



L1-RIGMU

WEIGHT	RIGAJO	RIGMO	RIGAJ	RIGMU
12 in	0.81 in	0.42	0.9	0.48
24 in	1.34 in	0.7	1.5	0.86
34 in	1.94 in	1.0	2.2	1.3
45 in	NA	1.3	NA	NA
56 in	NA	1.6	NA	NA

VOLTAGE	RIGAJO	RIGMO	RIGAJ	RIGMU
	48V	48V	24V	24V

LUMEN/FT	RIGAJO	RIGMO	RIGAJ	RIGMU
	495	495	510.5	510.5

ADJUSTABLE	RIGAJO	RIGMO	RIGAJ	RIGMU
	Yes	No	Yes	No

LUMEN/FT	RIGAJO	RIGMO	RIGAJ	RIGMU
	6W	6W	5.4 W	5.4W

Compatible Track Lighting

Pendant: 80+/90+ CRI, 2700K/3000K/3500K/4000K/Amber



PO-TI

Voltage: 24V/48V
Lumens: 291lm(3W), 493lm(7W)
Length: 12in/18in/24in/36in/48in
Weight(12in): 0.537lb.

Track Heads: 80+/90+ CRI, 2700K/3000K/3500K/4000K/Warm Dim



K0-GEM20



K1-GEML2



K0-GEM4R



K1-GEML4



K1-GEL6R


Voltage: 24V

WEIGHT(LB)	GEM20	GEML2	GEM4R	GEML4	GEL6R
	0.319	0.392	0.352	0.515	0.585


APERATURE(IN)	GEM20	GEML2	GEM4R	GEML4	GEL6R
	0.7	1	0.7	1	1

END FEED: Wiring Diagram

- **0-10V, Dali, ONE CIRCUIT**

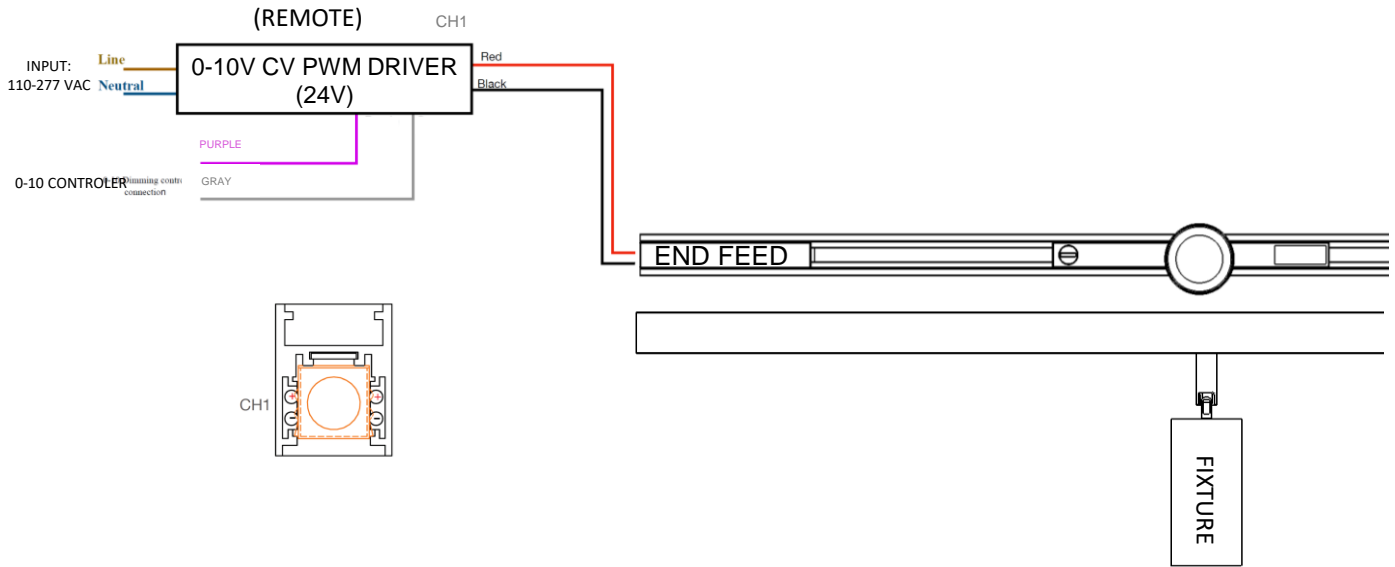


- **0-10V, Dali, TWO CIRCUIT**

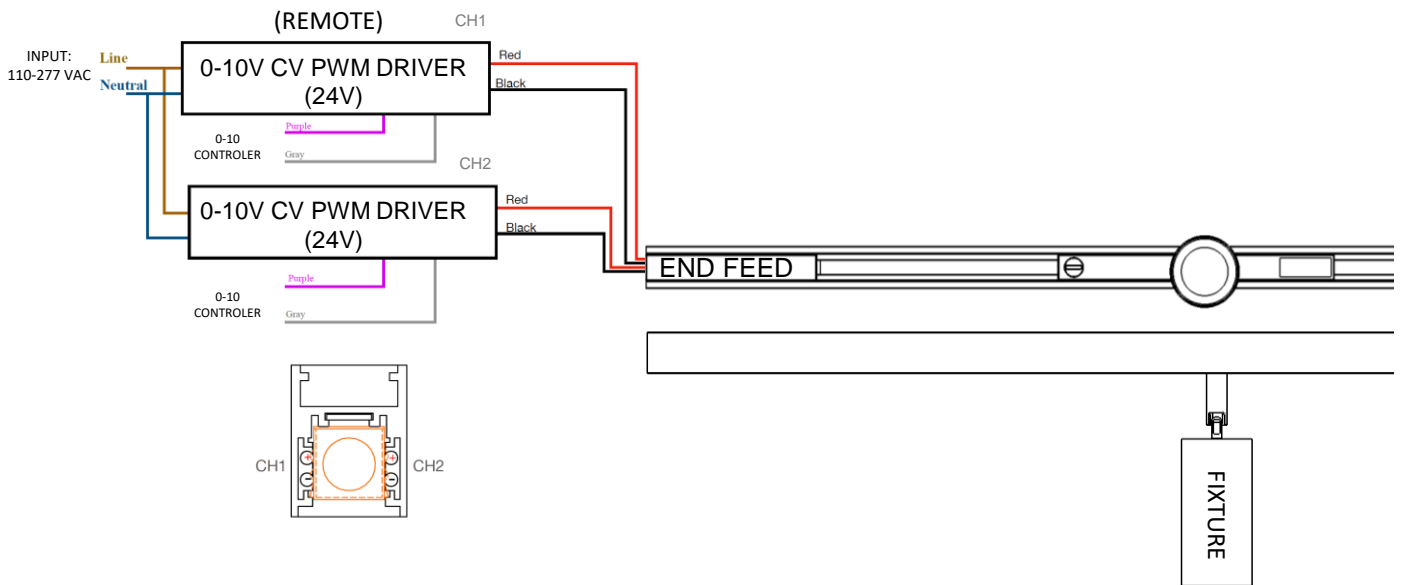


END FEED: Wiring Diagram



CHANNEL 1 MINI TRACK END FEED WIRING

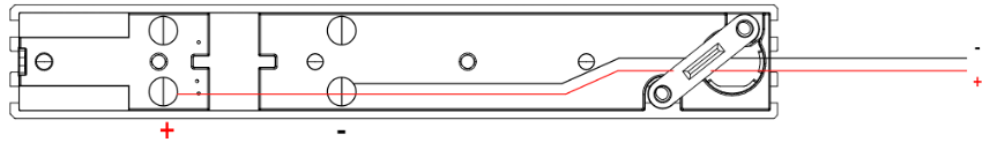

CHANNEL 2 MINI TRACK END FEED WIRING

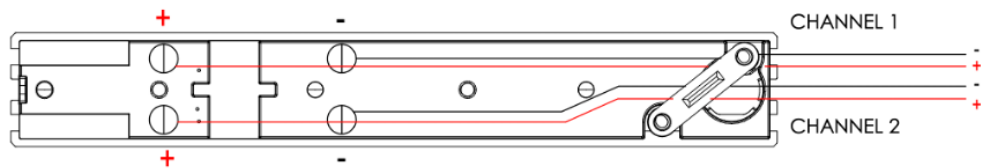

END FEED: Installation

