


Surface Mount Mini-Track

S Series

Project:

Type:

Contact:

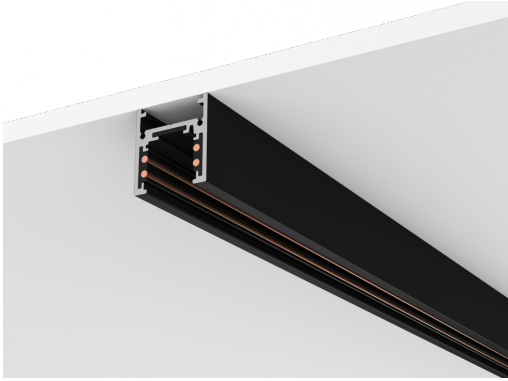



K M2S

MODEL	Track Length	Color
M2S: Mini-Track Surface S	04 : 4 FT 08 : 8 FT	W00 : White B00 : Black

Notes:









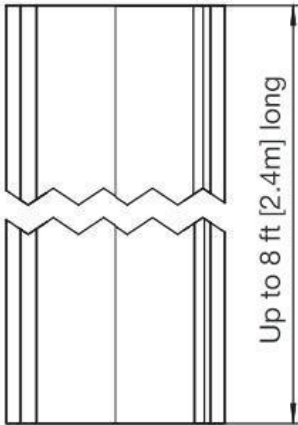





Drivers are designed with universal input voltage compatibility, accommodating a range from 120V to 277V.













DIMENSIONS / DRAWINGS



SURFACE MOUNT MINI-TRACK ACCESSORIES

S SERIES

CODE	NAME	DESCRIPTION		
K-MES-00-B000H W-White	End Cap With Central Hole	End Cap For Surface Mounted S Mini-Track With Locking Screws With Central Hole And Gasket For Cable		
K-MES-00-B0000 W-White	End Feed	End Cap For Surface Mounted S Mini-Track With Locking Screws		
K-MF0-00-BEND0 W-White	End Feed	Mini-Track Short End Feed		
K-MF0-00-BMIDE W-White	End Feed	Mini-Track Short Jointing Connector with Electrical Connection.		
K-MF0-00-BMIDM W-White	Non-conductive Joiner	Mini-Track Short Mechanical Jointing Connector		
K-MF0-00-BL000 W-White	L Conductive Joiner	Mini-Track L Conductive Joiner		
K-MCS-00-BLJ00 W-White	L Joint Cover	Cover For L Joint For Surface Mounted S Mini-Track		

CODE	NAME	DESCRIPTION		
K-MF0-00-BCOR0 W-White	Corner Conductive Joiner	Mini-Track And Adjustable Corner Feed		
K-MBS-00-BMB00 W-White	Cover Strip	Mini-Track Cover (Aesthetic) - 8FT		
K-MED-00-B0000 W-White	Surface Mounting Bracket	Mounting Bracket For Surface Mount Track		
K-MC0-04-BSTAE W-White	Cover Strip	Mini-Track Cover (Aesthetic) - 4FT		
K-MC0-08-BSTAE W-White	Cover Strip	Mini-Track Cover (Aesthetic) - 8FT		
K-MB0-SH-OREIO	Short Bracket	Mini-Track Aluminum Reinforcing Short Bracket For Jointing Connector, Use With Pendant Direct/Indirect, Trimmed Recessed, Surface/Pendant Mounted Mini Track.		
K-MB0-LG-OREIO	Long Bracket	Mini-Track Aluminum Reinforcing Long Bracket For Jointing Connector, Use With Pendant Direct/Indirect, Trimmed Recessed, Surface/Pendant Mounted Mini Track.		

Product Overview

Type: Surface Mount Mini-Track S

Circuit(s)/Amps: 2 circuits: 2x +/- 15A/0-60V dc or 1 circuit + Data Bus: +/- 10A/0-60V + D+/D-

Voltage: 24V/48V

Weight: 1.01 lb. [459g] / ft / 1506.2g/kg

Available Colors: Black RAL 9005 embossed / White RAL 9016 embossed


Driver: DALI 1% dim, 0-10V 1% dim, Forward/Reverse Phase Cut dim

Compatible Track Lighting


Linear: 90+ CRI, 3000K




L1-RIGAJO

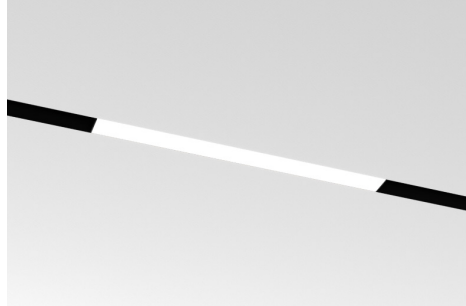

L1-RIGMO

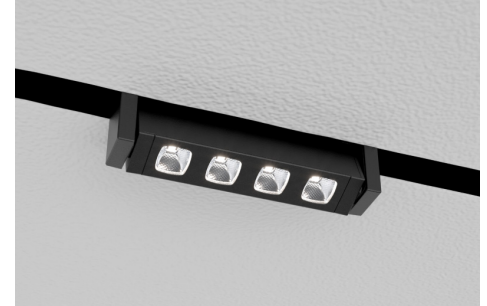

L1-RIGAJ

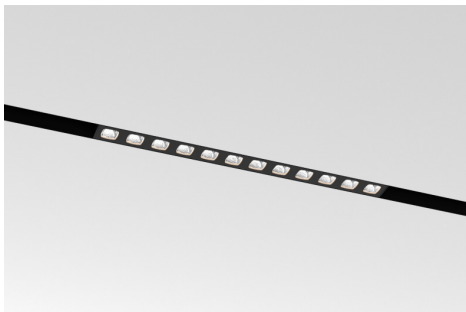

L1-RIGMU

WEIGHT	RIGAJO	RIGMO	RIGAJ	RIGMU
12 in	0.81 in	0.42	0.9	0.48
24 in	1.34 in	0.7	1.5	0.86
34 in	1.94 in	1.0	2.2	1.3
45 in	NA	1.3	NA	NA
56 in	NA	1.6	NA	NA

VOLTAGE	RIGAJO	RIGMO	RIGAJ	RIGMU	LUMEN/FT	RIGAJO	RIGMO	RIGAJ	RIGMU
	48V	48V	24V	24V		495	495	510.5	510.5

ADJUSTABLE	RIGAJO	RIGMO	RIGAJ	RIGMU	LUMEN/FT	RIGAJO	RIGMO	RIGAJ	RIGMU
	Yes	No	Yes	No		6W	6W	5.4 W	5.4W

Compatible Track Lighting

Pendant: 80+/90+ CRI, 2700K/3000K/3500K/4000K/Amber



PO-TI

Voltage: 24V/48V
Lumens: 291lm(3W), 493lm(7W)
Length: 12in/18in/24in/36in/48in
Weight(12in): 0.537lb.

Track Heads: 80+/90+ CRI, 2700K/3000K/3500K/4000K/Warm Dim



K0-GEM20



K1-GEML2



K0-GEM4R



K1-GEML4



K1-GEL6R


Voltage: 24V

WEIGHT(LB)	GEM20	GEML2	GEM4R	GEML4	GEL6R
	0.319	0.392	0.352	0.515	0.585


APERATURE(IN)	GEM20	GEML2	GEM4R	GEML4	GEL6R
	0.7	1	0.7	1	1

END FEED: Wiring Diagram

- **0-10V, Dali, ONE CIRCUIT**

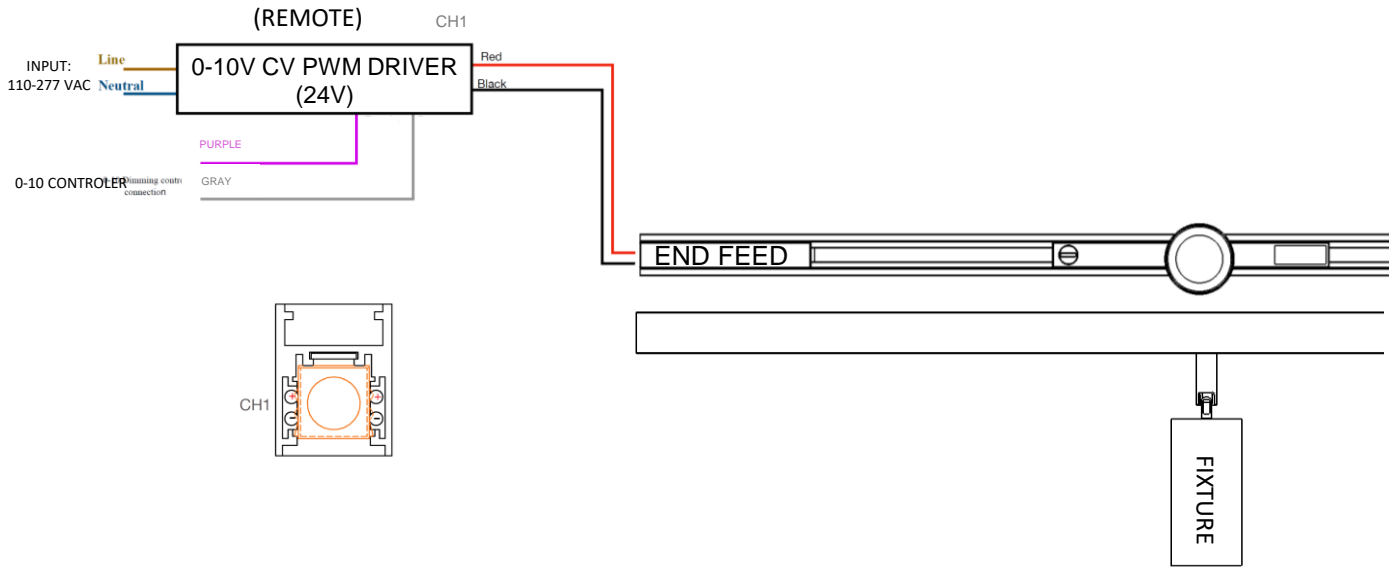


- **0-10V, Dali, TWO CIRCUIT**

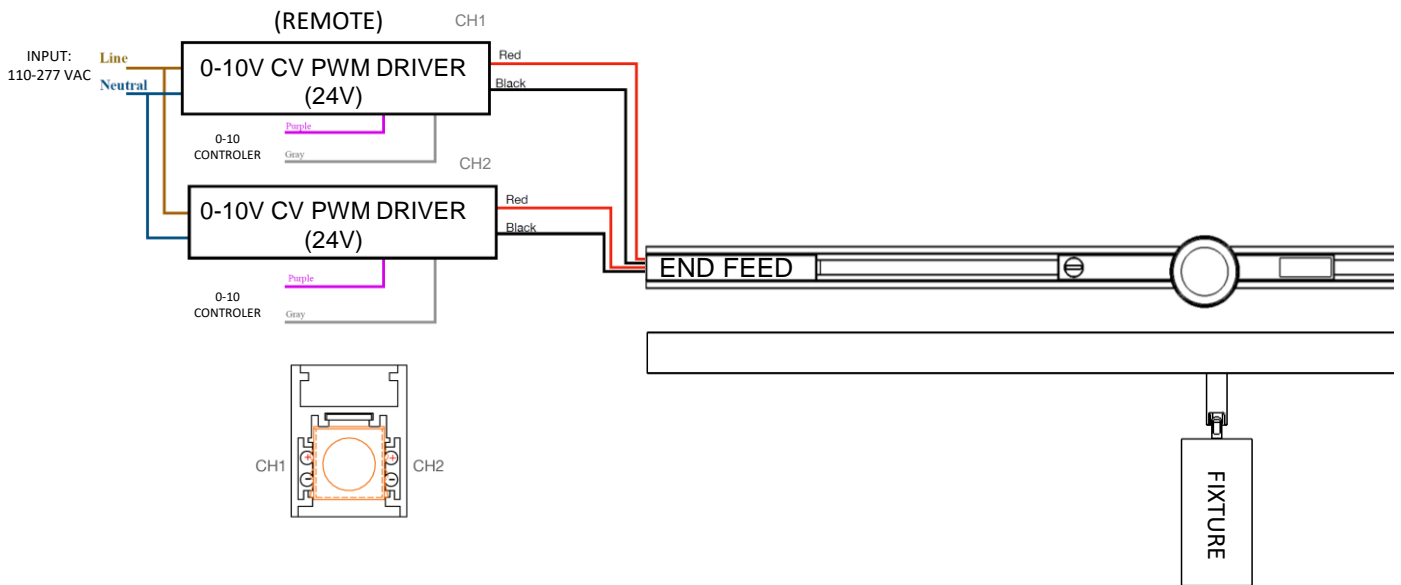


END FEED: Wiring Diagram



CHANNEL 1 MINI TRACK END FEED WIRING

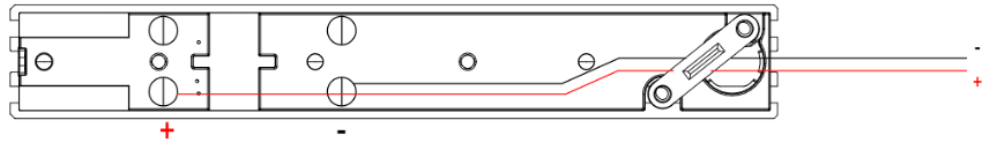

CHANNEL 2 MINI TRACK END FEED WIRING

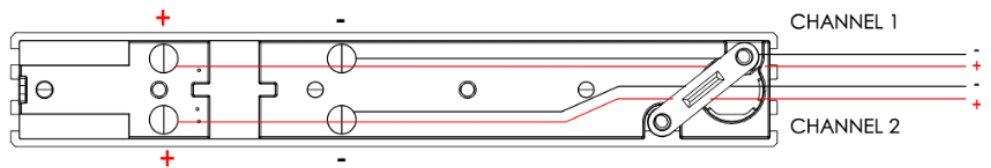

END FEED: Installation

