



## QTM - eLED +TW

### Features

- ✓ DC power supply designed for tunable white applications
- ✓ Utilizes 100W constant voltage LED drivers and QTL's proprietary AW dimming module
- ✓ Control provided by two 0-10V inputs: one for intensity and one for color temperature
- ✓ Available in 100-300 watts of output
- ✓ Housing can be surface or recess mounted


A1-QTMTW-210LB-00-24-17-0-10  
A1-QTMTW-610LB-00-24-17-0-10



### SPECIFICATION

<b>Output</b>	<b>DC Voltage</b>	24VDC
	<b>Max Load</b>	100 W / 300 W
<b>Input</b>	<b>Voltage &amp; Frequency Range</b>	110 - 277VAC ; 50hz/ 60 Hz
	<b>AC Current (Max.)</b>	.98A Max
<b>Protections</b>	<b>Over Voltage</b>	Yes
	<b>Short Circuit</b>	Yes
<b>Environment</b>	<b>Working Temp.</b>	-40°F +104°F (-40°C +90°C)
<b>Others</b>	<b>Dimension (L*W*H)</b>	14.5" (368.3mm) * 8.00" (203.2mm) * 4.00" (101.6mm)


## PRODUCT - DIMENSIONS

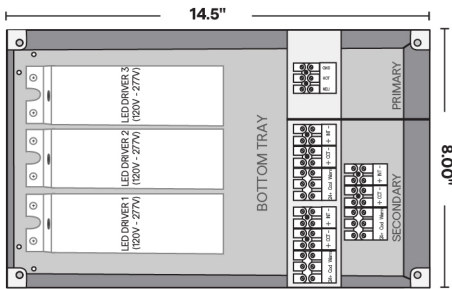


## COMPLIANCE

- EMI Spec
  - FCC 47 Part 15
  - EN61000-3-2
- CSA Certified
  - UL-2108
  - UL-8750
  - CSA C22.2 No 250.0-08
  - CSA C22.2 No 250.13-14

### Color Balance

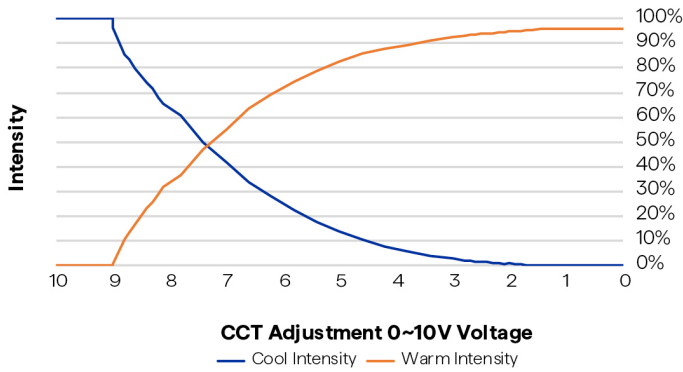

### Dimming Intensity Curve

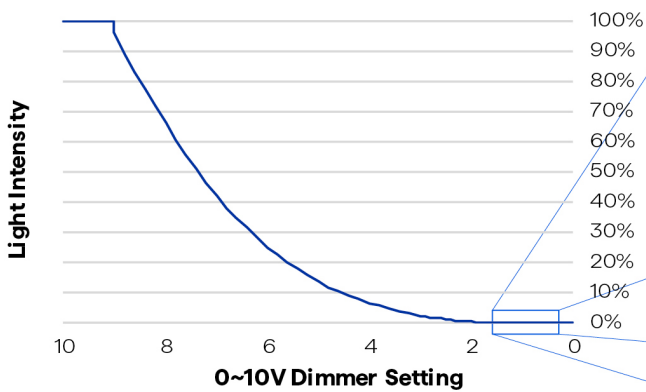

### Dimming Intensity Curve (Zoom)

